
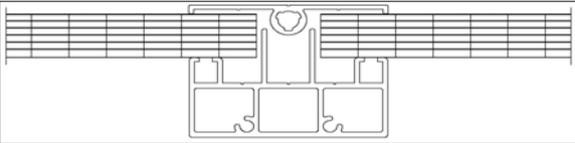

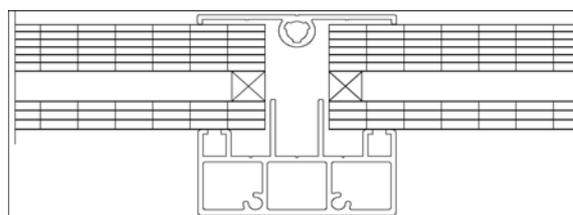


RWA Lichtstraßen - Verglasungsaufbau

Verglasung - Füllung mit mehrschaligem Aufbau

Stärke / Schalen	u-Wert	Lichtdurchlässigkeit (klar / opal)	
4/2	4,1		
4,5/2	4,0		
6/2	3,5		
10/2	3,0	76 / 60	
10/3	2,7		
10/4	2,5		
10/5	2,4		
16/3	2,4	68 / 57	
16/3 x	2,3		
16/7	1,7		
16/7	1,7		
20/5	1,8		
25/6	1,5		
32/5 x	1,4		
32/8	1,2		

Verglasung - Füllung mit distanzierendem mehrschaligen Aufbau

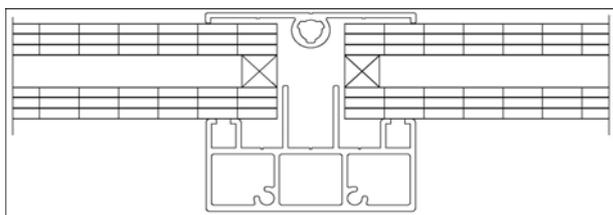

Außenschale	LZR	Innenschale	u-Wert [W/m²K]	Lichtdurchlässigkeit [%]
10/4	10	10/2	1,39	
10/4 opal	10	10/4 klar	1,25	46
16/7	10	6/2	1,19	
16/7	10	10/2	1,14	
16/7 opal	10	10/4 klar	1,05	43
16/7 opal	10	16/7 klar	0,89	39